



- ✓ High radiolucency
- ✓ Rounded edges
- ✓ Low-dose floating table top

## STILLE imagiQ2™ surgical imaging table

Shortening Procedure Times while Reducing Radiation Exposure

The STILLE imagiQ2™ represents an important advance in developing the low-dose technology field, making the OR an even safer place for patients and for the entire surgical team.

### Increase efficiency and shorten procedure times

The True Free Float™ technology of the STILLE imagiQ2 gives unprecedented control and freedom of movement in any desired direction while providing state-of-the-art smoothness. Like an extension of the surgeon's hand, the True Free Float™ increases efficiency in the OR and shortens procedure times. The patented technology of the ISO-ROLL™ cradling motion ( $\pm 15^\circ$ ) helps maintain image focus even while in full lateral roll, minimizing patient and C-arm repositioning, as well as reducing scatter radiation.



Specifically designed for oblique imaging and eliminating image artifacts while enhancing image quality.

### Reduce radiation exposure and enhance image quality

The unique high-performance carbon fiber table top provides outstanding radiolucency of 0.4 mm Al equivalency, enabling the C-arm to reduce the radiation exposure without compromising image quality. That is up to 60% more radiolucent than average tables on the market. Its ultra-slim design, super low-base and retractable wheels, maximize C-arm access and allow the image receiver to come closer to the patient, thus reducing radiation exposure while enhancing image quality.


### Choose a Low-Dose Enabler™

Taken together, the True Free Float™ technology, outstanding table top radiolucency and retractable wheels, is what makes the STILLE imagiQ2™ a true Low-Dose Enabler™ and the ideal C-arm complement for the mobile Hybrid OR or office suite.

### Table movement ranges\*

Height adjustment	71.0-109.0 cm
Trendelenburg	±20° (±25° optional)
Lateral roll (ISO-ROLL™)	±15°
Longitudinal Float	90.0 cm
Lateral Float	25.0 cm
Diagonal Float	93.4 cm

\* ± 2.0° tolerance for angles  
± 1.25 cm for lengths

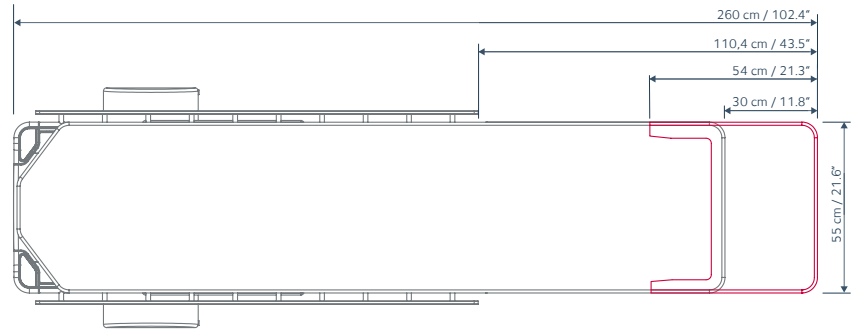

### Product specifications of the STILLE imagiQ2™

<b>Weight capacity</b>	300 kg in any position; the table top does not have to be centered.
<b>Table top length, width</b>	L = 230 cm / 90.5" ; W = 55 cm / 21.6"
<b>Radiolucent length</b>	199.2 cm / 89.0" with 3D headrest (169.2 cm / 66.6" without headrest)
<b>Radiolucent table top</b>	Proprietary, patent pending carbon fiber structure. Al 0.4 mm
<b>Float &amp; lock</b>	True Free Float™ allowing smooth movements + STILLE quick-lock system
<b>Operation conditions</b>	100% continuous
<b>AC power: 100-250 Volts</b>	Direct AC power + battery DC power
<b>Length, width, height</b>	L = 234 cm / 92"; W = 77.2 cm / 30.3"; H = 71-109 cm / 28"-43"
<b>Wheels and steering</b>	4 swiveling back wheels
<b>Side rails</b>	Fixed, about 142.5 cm / 56.1"
<b>Exchangeable table top</b>	Yes, future-proof platform for extended use
<b>Transport handle</b>	Yes, color: silver

## Customizing the imagiQ2 to fit your needs

**Mobility enhancement pack (Ref: 535-1711) ▶** When the table is used for frequent intra-clinic transportation, use the mobility enhancement pack for improved mobility. All wheels are designed to swivel and an additional fifth wheel is included to provide optimal mobility.

**Increased Trendelenburg pack (Ref: 535-1713) ▶** Maximize Trendelenburg capabilities by choosing the increased Trendelenburg pack. This allows you to extend the Trendelenburg angle from 20 degrees to 25 degrees. This upgrade is only compatible without the load upgrade pack. *Please note that this option must be specified on original order before delivery. It cannot be retrofitted to an already delivered unit. With this option, the weight capacity is 225 kg and the transport handles are dark grey.*

**STILLE AB**  
Ekbacken 11  
644 30 Torshälla  
Sweden

☎ +46 8 588 580 00  
✉ sales@stille.se  
🌐 www.stille.se

**STILLE Surgical Inc.**  
840 Parkview Blvd  
Lombard, IL 60148  
USA

☎ +1 800 665 1614  
✉ sales.us@stille.se  
🌐 www.stille.se/us

These products may not be available in all regions. Please contact your STILLE-representative for more information on market availability.

This document correctly describe these devices at the time the document was printed. Please always refer to the user manual for any product amendments.

The product images shown are for illustration purposes only and may not be an exact representation of the product.